


SPECIFICATIONS AND TECHNICAL INFORMATION FOR THE PRIVATE SEWER OF BUILDING

TYPICAL GROUND PLAN OF BUILDING & SEWERS

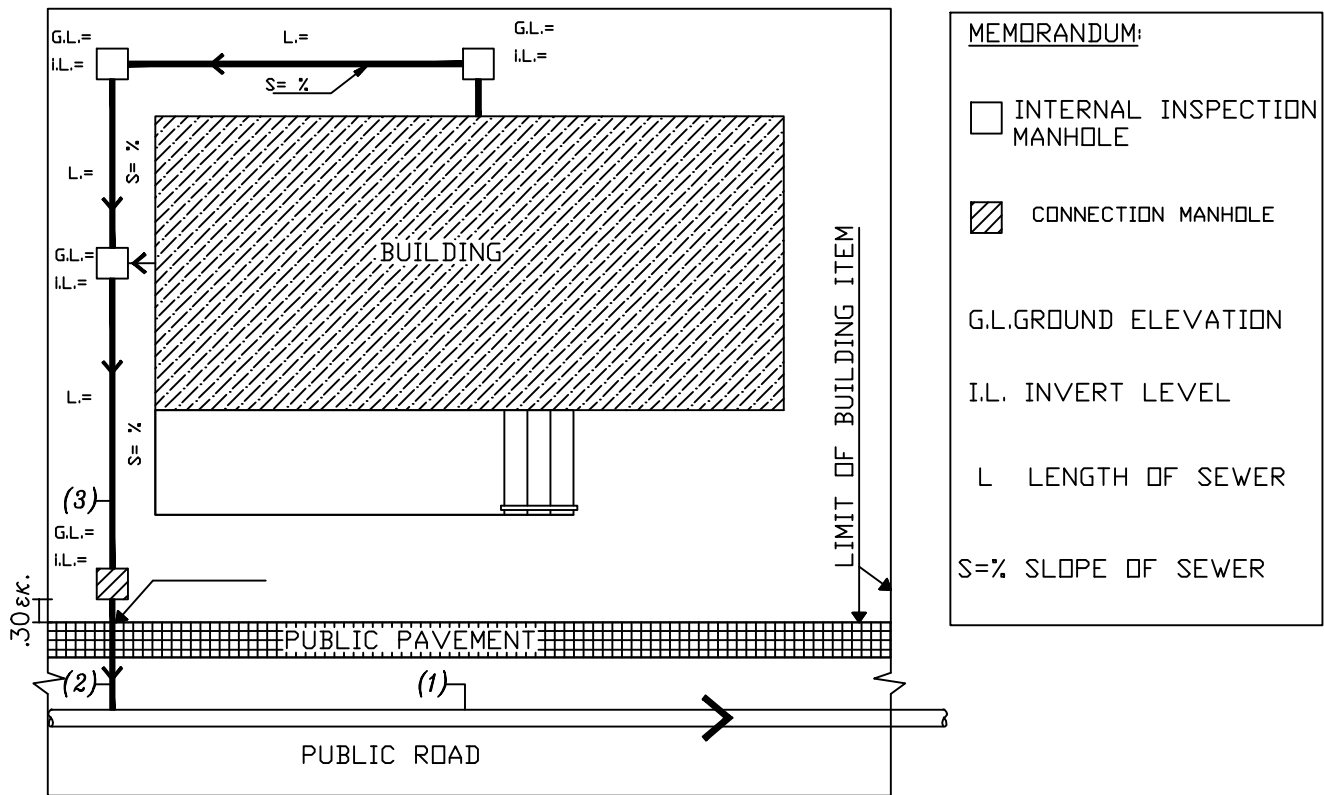

1. PUBLIC SBLA LATERAL SEWER

2. PUBLIC HOUSE CONNECTION SEWER OF BUILDING

It usually leads up to the street line of plot, to a depth of 1.30m under the surface of pavement. It should be excavated and located before by any other work begins. In the stage of the construction of P.H.C. a wooden peg 4x4 cm. is placed at the end of it for localisation.

3. PRIVATE SEWER OF BUILDING (P.S.B.)

3,1 MATERIALS :

Pipe with minimum diameter 10 cm
manufactured from plastic U.P.V.C thickness of
3,2 mm or other material approved from the Sewerage
Board

3,2 Slope 2% (Minimum 1%)

3,3 The sewer pipeline should be placed in suitable sublayer 3/8" gravel

